

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 926 288 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
30.06.1999 Bulletin 1999/26

(51) Int Cl.<sup>6</sup>: D04H 1/46, D04H 1/56,  
D21H 25/00, D04H 5/02,  
A47L 13/16, D21H 13/10

(21) Application number: 98310757.4

(22) Date of filing: 24.12.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Kobayashi, Toshio, c/o Research & Dev. Division  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)  
• Takeuchi, Naohito, c/o Research & Dev. Division  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)  
• Suzuki, Niou, c/o Research & Dev. Division  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(30) Priority: 26.12.1997 JP 35909997

(71) Applicant: UNI-CHARM CORPORATION  
Kawanoe-shi Ehime-ken (JP)


(74) Representative: Parry, Christopher Stephen  
Saunders & Dolleymore,  
9 Rickmansworth Road  
Watford, Herts. WD1 7HE (GB)

(54) Nonwoven fabric and method for making same

(57) A nonwoven fabric suitable to be used as a kitchen paper including thermoplastic synthetic fibers 3 being 7 ~ 30 mm long and as fine as of 0.1 ~ 0.8 d, in 90 ~ 10 % by weight and pulp fibers 4 being 2 ~ 7 mm

long, in 10 ~ 90 % by weight, these component fibers being mixed together as homogeneously as possible and mechanically entangled so as to have a basis weight of 10 ~ 80 g/m<sup>2</sup> as a whole.

FIG.2

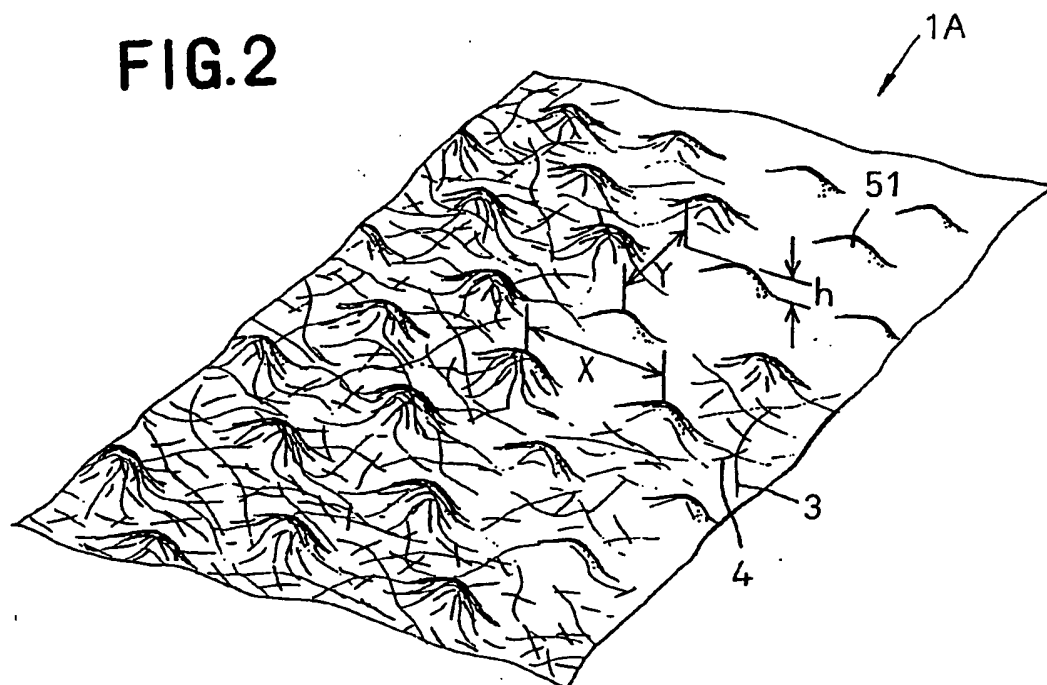

EP 0 926 288 A1

## Description

[0001] This invention relates to nonwoven fabrics well adapting itself to embossing and suitable for use as water-absorbent kitchen papers, wipe-out sheets, etc. as well as a method for making such nonwoven fabric.

[0002] It is well known to emboss/deboss nonwoven fabrics comprising a mixture of thermoplastic synthetic fibers having a fineness of 1 ~ 10 d and thereby to form an emboss/a deboss pattern thereon so that the nonwoven fabric may be used as water-absorbent kitchen papers or wipe-out sheets.

[0003] However, it is not necessarily easy to form irregularities thereon by embossing the kitchen papers or the like of the prior art because the synthetic fiber has relatively high rigidity and elasticity. This is true particularly when it is desired to form fine or distinctly contoured embosses/debosses.

[0004] When it is attempted to feed a web of nonwoven fabric through an embossing machine and thereby to obtain kitchen papers formed with apertures each having a diameter in order of 5 mm or less, individual fibers may often extend from the aperture periphery into this aperture, resulting in the indistinctly contoured aperture. Probably, it is for the reason that the individual fibers can not be smoothly rearranged around each of projections provided on the embossing machine sufficiently to form the desired distinctly contoured aperture. The smaller a diameter of the aperture and/or the larger a basis weight of a nonwoven fabric is, the greater this problem becomes. While it is obvious that the individual fibers extending into the aperture lead to a substantial reduction of the aperture's diameter, a degree of such reduction is not necessarily uniform. This makes a proper design of the aperture difficult. Accordingly, it is required for nonwoven fabric used as material for kitchen papers or the like to have a sufficiently high formability to facilitate formation of embosses/debosses or apertures.

[0005] In view of the problem as has been described above, it is an object of the invention to provide a nonwoven fabric having a sufficiently high formability to facilitate formation of embosses/debosses or apertures when such nonwoven fabric is intended to be used as material for kitchen papers or the like, on one hand, and to provide a method for making such nonwoven fabric.

[0006] According to a first aspect of the invention, there is provided a nonwoven fabric containing thermoplastic synthetic microfibers, the nonwoven fabric comprising synthetic microfibers being 5 ~ 30 mm long and as fine as of 0.1 ~ 0.8 d, in 90 ~ 10 % by weight, mixed and mechanically entangled with pulp fibers being 2 ~ 7 mm long, in 10 ~ 90 % by weight, so as to have a basis weight of 10 ~ 80 g/m<sup>2</sup> as a whole.

[0007] According to the first aspect of the invention, melt blown fibers are preferably selected as the thermoplastic synthetic fibers.

[0008] According to a second aspect of the invention,

there is provided a method for making a nonwoven fabric containing thermoplastic synthetic microfibers, the method comprising the steps of:

- a. obtaining a wet sheet from slurry containing 0.5 ~ 20 % by weight of a fibrous mixture dispersed in water, the fibrous mixture comprising thermoplastic synthetic fibers being 7 ~ 30 mm long and as fine as of 0.1 ~ 0.8 d, in 90 ~ 10 % by weight, mixed with pulp fibers being 2 ~ 7 mm long, in 10 ~ 90 % by weight; and
- b. placing the wet sheet on a support and then subjecting the wet sheet to high velocity water jet streams of 50 ~ 200 kgf/cm<sup>2</sup> for mechanically entangling the fibrous mixture.

[0009] According to the second aspect of the invention, melt blown fibers are preferably selected as the thermoplastic synthetic fibers.

Fig. 1 is a plan view of a nonwoven fabric according to the invention;

Fig. 2 is a perspective view of a kitchen paper made of the nonwoven fabric according to the invention; Fig. 3 is a diagram schematically illustrating the steps of a method for making the nonwoven fabric; and

Fig. 4 is a perspective view of a drum used in the method.

[0010] Details of a nonwoven fabric and a method for making the nonwoven fabric will be more fully understood from the description given hereunder with reference to the accompanying drawings.

[0011] Fig. 1 is a plan view of a nonwoven fabric. The nonwoven fabric 1 has a basis weight of 10 ~ 80 g/m<sup>2</sup> and the nonwoven fabric 1 comprises thermoplastic synthetic fibers 3 being 7 ~ 30 mm long and as fine as of 0.1 ~ 0.8 d, in 90 ~ 10 % by weight, and pulp fibers 4 (e.g., NBKP), in 10 ~ 90 % by weight. These fibers 3, 4 are mixed with each other as homogeneously as possible so that they are mechanically entangled to maintain the form of a nonwoven fabric. Individual fibers are randomly distributed or slightly oriented in the machine direction during a manufacturing process of the nonwoven fabric 1 as will be described later. It should be understood that none of binding agents such as poval is employed in making the nonwoven fabric.

[0012] Fig. 2 is a perspective view of a nonwoven fabric 1A having a plurality of protuberances 51 obtained by embossing or deposing the nonwoven fabric of Fig. 1, which is adapted to be used as a kitchen paper. As seen in Fig. 2, the nonwoven fabric 1A is formed with the protuberances 51 having a height h and arranged at a pitch y in the longitudinal direction and at a pitch x in the transverse direction. The height h is in a range of 0.2 ~ 5 mm and the pitches y, x are in a range of 1 ~ 10 mm. While the synthetic fibers 3 and the pulp fibers

4 are observed to be slightly oriented so far as regions defined from bases toward crests of the respective protuberances 51 are concerned, they are randomly distributed in regions defined between each pair of the adjacent protuberances 51 just as in the nonwoven fabric of Fig. 1.

[0013] Fig. 3 is a diagram exemplarily illustrating the steps of the inventive method for making the nonwoven fabric 1 and the kitchen paper 1A obtained therefrom. The method starts from the left in Fig. 3. Slurry containing 0.5 ~ 20 % by weight of the fibrous mixture which comprises, in turn, the thermoplastic synthetic fibers 3 and the pulp fibers 4 at a weight ratio of 10 : 90 ~ 90 : 10 is supplied through a feed pipe 11 to a slurry tank 12. From the slurry tank 12, slurry is then fed onto a first endless belt 13 in a suction zone 14 in which the first endless belt 13 describes a rightward ascending slope. In the suction zone 14, the slurry is dehydrated by a vacuum pump 16 and thereby a wet sheet 17 is obtained. The wet sheet 17 is then subjected, in a first zone 18, to high velocity water jet streams injected from a first nozzle 19 to stabilize a texture of the wet sheet 17 which is then transferred to a rotary drum 23 installed in a second zone 22. The amount of water injected in the first zone 18 is drawn by a suction mechanism 20. In the second zone 22, the wet sheet 17 supported on a smooth surface of the rotary drum 23 is subjected to high velocity water jet streams injected from a second nozzle 24 to ensure that component fibers of the wet sheet 17 are mechanically entangled together. Now the wet sheet 17 is transferred to a second endless belt 28 and subjected, in a third zone 26, to high velocity water jet streams injected from a third nozzle 27. Thereafter, the wet sheet 17 is dehydrated and dried by dehydrator/drier means 29 to obtain a nonwoven fabric 31. As will be apparent, the nonwoven fabric 31 may be cut into an appropriate size to obtain the nonwoven fabric 1 of Fig. 1. If desired, the nonwoven fabric 31 may be further transported so as to pass between a pair of embossing rolls 32, 33. The embossing roll 32, one of these rolls, is formed on its peripheral surface with forming elements 34 comprising a plurality of conical or pyramidal projections so that a continuous sheet of kitchen paper 1A having the protuberances 51 as shown in Fig. 2 is obtained as the forming elements 34 are pressed against the nonwoven fabric 31. The continuous sheet of nonwoven fabric 31 or kitchen paper 1A obtained in this manner may be taken up in the form of a roll 36. If necessary, such continuous sheet of nonwoven fabric 31 or kitchen paper 1A may be further processed, using an embossing machine or the like, to be formed with a plurality of apertures each having a diameter of 0.5 ~ 5 mm.

[0014] Along the line of production as has been described above, it is preferably that the second and third zones 22, 26 are also provided with the suction mechanisms 20 similar to those provided in the first zone 18. The high velocity water jet streams injected in the first, second and third zones 18, 22, 26 is preferably columnar

streams and pressure of these water jet streams is preferably adjusted within a range of 50 ~ 200 kgf/cm<sup>2</sup>. It is not always necessary to use all of the first, second and third zones but any one or more of these zones may be eliminated from the line of production.

[0015] Fig. 4 is a perspective view of a drum 230 provided on its peripheral surface with a flat zone 232, a plurality of projections 231 and a plurality of drain holes 233. The drum 23 having the smooth peripheral surface used in the line of production as illustrated by Fig. 3 may be replaced by the drum 230 to obtain the continuous sheet of kitchen paper 1A similar to that shown in Fig. 2. The drum 230 is disclosed in Japanese Patent Application Disclosure Gazettes Nos. Sho61-176346 and Sho62-69867. When the high velocity water jet streams impinge against the wet sheet 17 placed on the drum 230, the component fibers 3, 4 are reoriented so as to follow the configurations of the projections 231 and consequently the sheet 17 is formed with the protuberances 51. The protuberances 231 are distributed on the drum 230 in conformity with the distribution pattern of the forming elements 34 in Fig. 3. Accordingly, the step of forming the protuberances by the pair of rolls 32, 33 in Fig. 3 can be eliminated so far as the drum 230 is employed. The drum 230 may be in the form of a drum having its peripheral surface formed by a mesh screen when knuckles of the mesh screen are used as protuberance forming elements.

[0016] The nonwoven fabric 31 obtained by the method illustrated in Fig. 3 can reproduce the configurations of the forming elements 34 with a relatively high precision because both component fibers 3, 4 are relatively short, on one hand, and the synthetic fibers 3 has a relatively low fineness as well as a relatively low rigidity. When the forming elements 34 have a height h as small as 1 ~ 3 mm and/or the forming elements 34 are polygons having sharp ridgelines, an excellent formability of the nonwoven fabric 31 can be particularly effective. Such nonwoven fabric 31 preferably has a basis weight of 10 ~ 80 g/m<sup>2</sup> and the synthetic fibers 3 preferably comprises melt blown fibers.

[0017] In the line of production illustrated in Fig. 3, the slurry containing relatively short fibers 3, 4 is fed onto the endless belt 13 describing an ascending slope and thereby orientation of these fibers 3, 4 in the direction in which the belt 13 travels, i.e., in the machine direction is effectively prevented. As a result, the fibers 3, 4 are slightly oriented in the machine direction or randomly distributed between each pair of the adjacent protuberances 51 on the kitchen paper 1A. In this manner, the kitchen paper 1A is relatively isotropic.

[0018] It is possible to form a nonwoven fabric having protuberances by subjecting a web fed from a card of prior art to the processing steps illustrated in Fig. 3 starting from the first zone 18. However, the fibers which can be effectively processed by the conventional card is limited to that approximately 30 mm or longer and therefore it is difficult for the prior art to make the nonwoven fabric

1 or 31 presenting a high formability as realized by the invention.

[0019] The nonwoven fabric according to the invention comprises the pulp fibers of a relatively short fiber length mechanically entangled with the thermoplastic synthetic fibers also of a relatively short fibers length and a low fineness. Such unique composition enables the nonwoven fabric to precisely reproduce the configurations of the forming elements and thereby to have an excellent formability. It is possible to provide such nonwoven fabric with a desired water absorbability by properly selecting a mixture ratio of the synthetic fibers and the pulp fibers. This nonwoven fabric can be made useful particularly as kitchen papers or wipe-out sheets after its surface has been formed with a plurality of protuberances or apertures.

[0020] By utilizing the inventive method for making the nonwoven fabric, it is possible to obtain even from fibrous material having a fiber length too short to be processed by the conventional card.

5. A method according to Claim 4, wherein said thermoplastic synthetic fibers preferably is melt blown fibers.

#### Claims

1. A nonwoven fabric containing thermoplastic synthetic microfibers, said nonwoven fabric comprising:

thermoplastic synthetic fibers being 5 ~ 30 mm long and as fine as of 0.1 ~ 0.8 d, in 90 ~ 10 % by weight, mixed and mechanically entangled with pulp fibers being 2 ~ 7 mm long, in 10 ~ 90 % by weight, so as to have a basis weight of 10 ~ 80 g/m<sup>2</sup> as a whole.


2. A nonwoven fabric according to Claim 1, wherein said thermoplastic synthetic fibers preferably is melt blown fibers.

3. A nonwoven fabric according to Claim 1, wherein said nonwoven fabric is a kitchen paper or wipe-out sheet.

4. A method for making nonwoven fabric containing thermoplastic synthetic microfibers, said method comprising the steps of:

a. obtaining a wet sheet from slurry containing 0.5 ~ 20 % by weight of a fibrous mixture dispersed in water, said fibrous mixture comprising, in 90 ~ 10 % by weight, thermoplastic synthetic fibers being 7 ~ 30 mm long and as fine as of 0.1 ~ 0.8 d mixed with pulp fibers being 2 ~ 7 mm long, in 10 ~ 90 % by weight; and  
b. placing said wet sheet on a support and then subjecting said wet sheet to high velocity water jet streams of 50 ~ 200 kgf/cm<sup>2</sup> for mechanically entangling said fibrous mixture.

FIG. 1

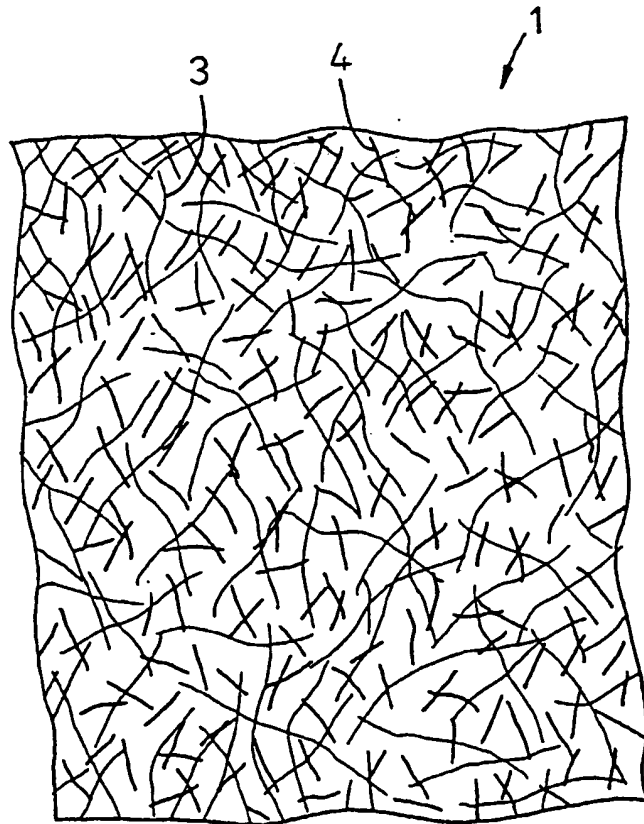

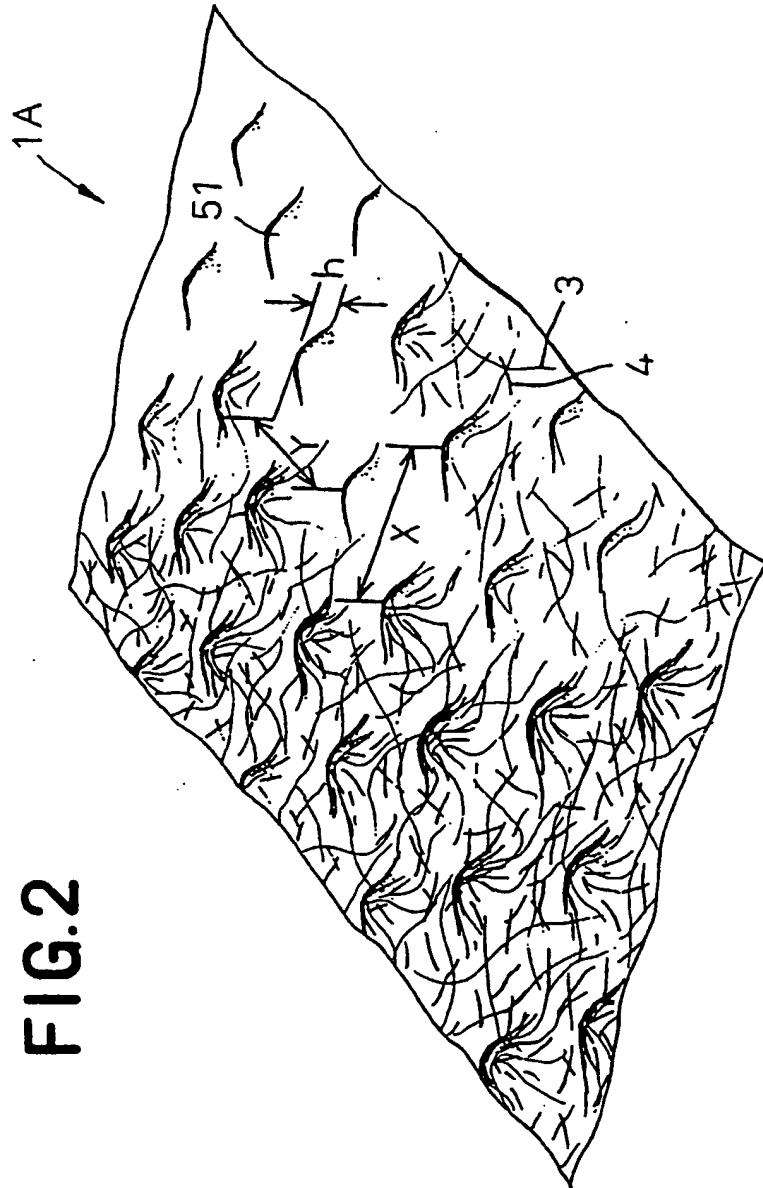


FIG. 2

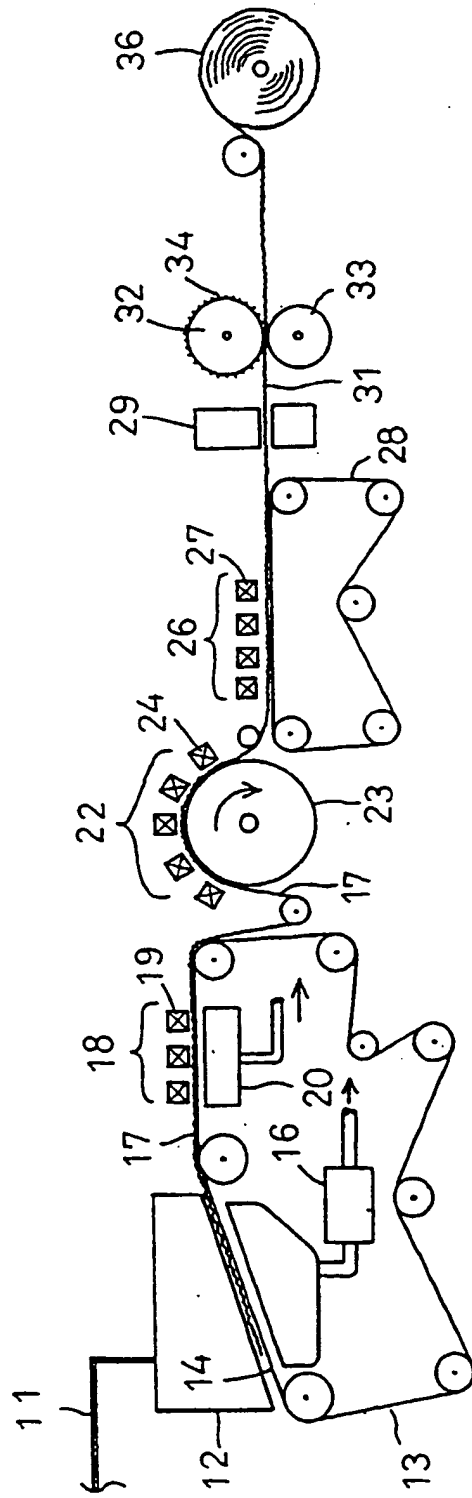


FIG. 3

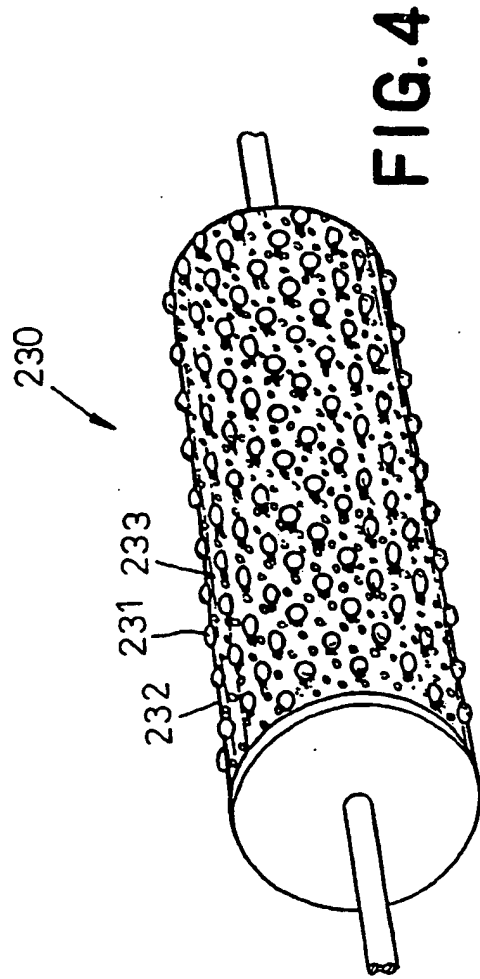


FIG. 4



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 31 0757

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D, A	EP 0 215 684 A (UNI CHARM CORP) 25 March 1987 * the whole document *	1-4	D04H1/46 D04H1/56 D21H25/00 D04H5/02 A47L13/16 D21H13/10
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 058 (C-1159), 31 January 1994 & JP 05 277053 A (OJI PAPER CO LTD), 26 October 1993 * abstract *	1-5	
A	PATENT ABSTRACTS OF JAPAN vol. 098, no. 004, 31 March 1998 & JP 09 324354 A (KINSEI SEISHI KK), 16 December 1997 * abstract *	1-5	
A	WO 96 12849 A (MOELNLYCKE AB ;HOLM ULF (SE); MILDING EBBE (SE)) 2 May 1996 * claim 1 *	1	
A	DATABASE WPI Section Ch, Week 8027 Derwent Publications Ltd., London, GB; Class A96, AN 80-47356C XP002099699 & JP 55 068367 A (MITSUI PETROCHEM IND CO LTD), 23 May 1980 * abstract *	1-5	TECHNICAL FIELDS SEARCHED (Int.Cl.6)  D04H D21H A47L
A	US 4 665 597 A (SUZUKI MIGAKU ET AL) 19 May 1987 * example 1 *	1-5	
A	EP 0 560 556 A (OJI PAPER CO) 15 September 1993	1	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>13 April 1999</b>	Examiner <b>Barathe, R</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (Pct/C1)



# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 98 31 0757

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-04-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0215684 A	25-03-1987	JP 1848877 C	07-06-1994
		JP 62069867 A	31-03-1987
		JP 1930635 C	12-05-1995
		JP 6063167 B	17-08-1994
		JP 62069868 A	31-03-1987
		DE 3685277 A	17-06-1992
		US 5414914 A	16-05-1995
WO 9612849 A	02-05-1996	SE 503606 C	15-07-1996
		AU 695089 B	06-08-1998
		AU 3820395 A	15-05-1996
		CA 2201133 A	02-05-1996
		CN 1133914 A	23-10-1996
		CZ 9701227 A	17-09-1997
		EP 0788569 A	13-08-1997
		FI 971645 A	18-04-1997
		HU 77969 A	28-01-1999
		JP 10507792 T	28-07-1998
		NO 971626 A	09-04-1997
		NZ 294969 A	26-06-1998
		PL 319836 A	01-09-1997
		SE 9403618 A	25-04-1996
		SK 46397 A	08-10-1997
		ZA 9508863 A	23-05-1996
US 4665597 A	19-05-1987	JP 1490935 C	07-04-1989
		JP 59125954 A	20-07-1984
		JP 62057733 B	02-12-1987
		AT 104375 T	15-04-1994
		DE 3486304 D	19-05-1994
		DE 3486304 T	21-07-1994
		EP 0147904 A	10-07-1985
EP 0560556 A	15-09-1993	JP 2826586 B	18-11-1998
		JP 5253160 A	05-10-1993
		JP 5277053 A	26-10-1993
		JP 2630164 B	16-07-1997
		JP 5285083 A	02-11-1993
		JP 5286100 A	02-11-1993
		JP 6017364 A	25-01-1994
		JP 2621742 B	18-06-1997
		JP 6017365 A	25-01-1994
		DE 69314202 D	06-11-1997
		DE 69314202 T	14-05-1998
		CA 2093985 A	16-10-1993

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

